


泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

1	MODEL	1635IXBOX-01(GP)
2	Dimension	54X17.3X10.5H Weight 19.6 Gram.
3	Magnet	Materials Rare Earth Size ϕ 8.0X2.0 mm.
4	Nominal Impedance	4 Ohm \pm 15 %
5	Power Rating	Normal 2.0 W. Maximum 3.0 W.
6	Lowest Resonant Frequency	1250 \pm 250 Hz
7	Output Sound Pressure Level	78 \pm 3 dB / 1 Watt 1 Meter.
		Average at 1500,2000,2500,3000 HZ
8	Frequency Range	800~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 2.83 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 2.83 Volts. (RMS) 48 Hrs.
12	Operation Temperature	-25°C ~ +60°C
13	Storage Temperature	-40°C ~ +70°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

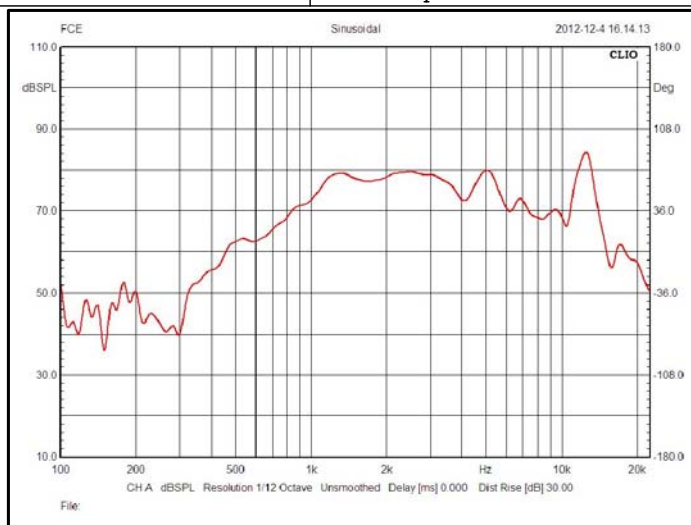

Bill of Material	
ITEM	SPEC.
SURROUND	CLOTH
DIAPHRAGM	CLOTH
DUST CAP	PET


Dimension:
details see drawing name "1635IXBOX-01(GP)outside view".

Unit:mm

Admitted:

Approved:

Made:

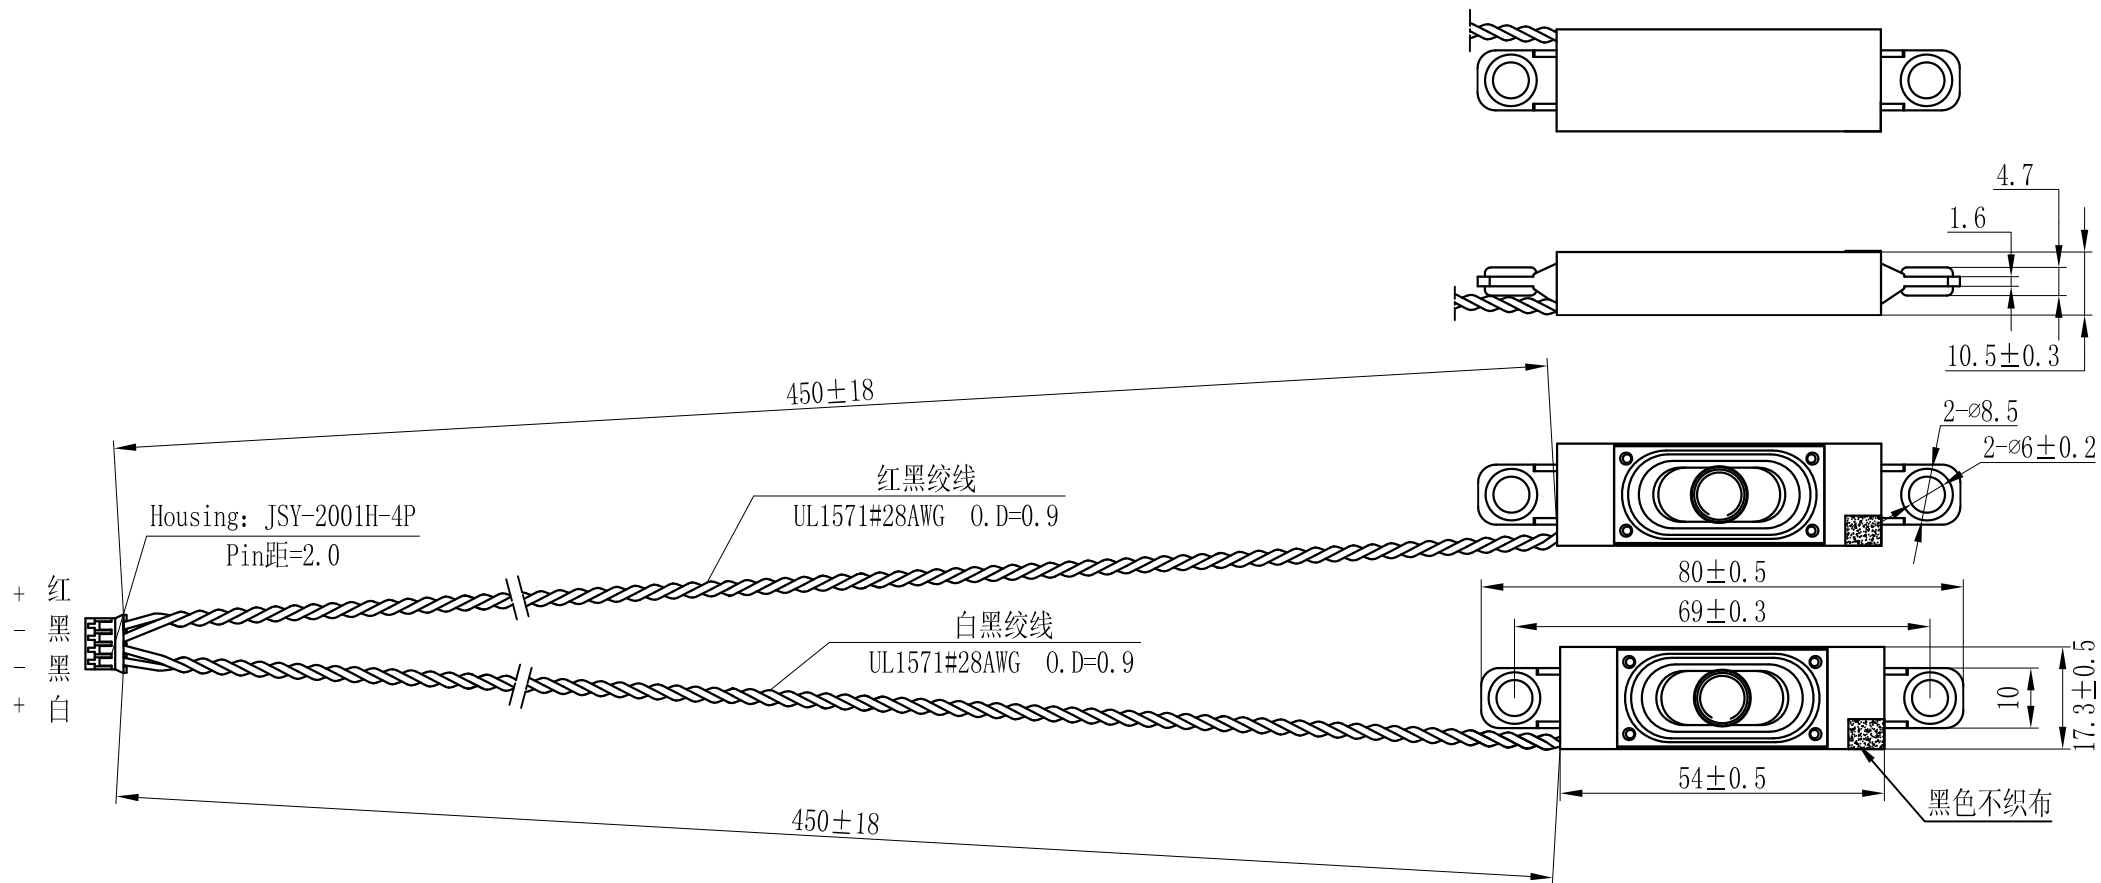

1635IXBOX-01 (GP) 外观图			产品名称		1635IXBOX-01 (GP) 型音箱	
			料号			
设计			比例	0.8: 1	数量	
制图			材料	重量		
审核			共1页第1页			
工艺			 泉州豐勤電子有限公司 QUANZHOU FENGQIN ELECTRONIC CO., LTD.			
标准化						
批准						