


泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

1	MODEL	2828IBOX-11(GP)
2	Dimension	28.0X28.0X13.0H Weight 35 Gram.
3	Magnet	Materials Rare Earth Size ϕ 14.7X2.0 mm.
4	Nominal Impedance	4 Ohm \pm 15 %
5	Power Rating	Normal 2.0 W. Maximum 4.0 W.
6	Lowest Resonant Frequency	750 \pm 150 Hz
7	Output Sound Pressure Level	76 \pm 3 dB / 1 Watt 1 Meter.
		Average at 800,1000,1200,1500 Hz
8	Frequency Range	420~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 2.83 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 2.83 Volts. (RMS) 48 Hrs.
12	Operation Temperature	-25°C ~ +60°C
13	Storage Temperature	-40°C ~ +70°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

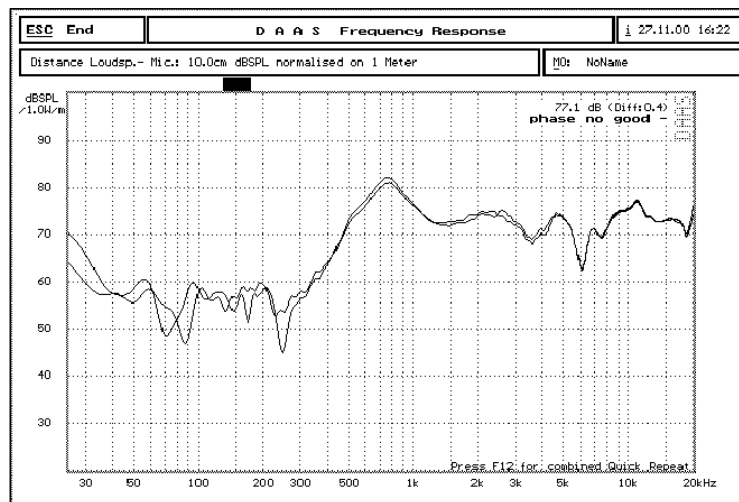

Bill of Material	
ITEM	SPEC.
SURROUND	FOAM
CONE	
DUST CAP	PET

Dimension:
details see drawing name “2828IBOX-11(GP)外观图”

Admitted:

Approved:

Made: