



泉州豐群電子有限公司


C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

1	MODEL	FM9745P003-1(GP)
2	Omindirectional Electret Condenser Microphone Cartridge	全向駐極體電容傳聲器極頭
3	High-performance, cost-effective electret condenser microphone cartridge	高性能, 低成本駐極體電容傳聲器極頭
4	FM-54FP1 series are low voltage 1.5V operation	FM-54FP1系列是低壓1.5伏驅動式傳聲器
5	microphone and suitable for all telephone applications, intercoms and computers	適用於電話機, 對講機和電腦

$V_s=3.0V$ $R_L=2.2k\ \Omega$

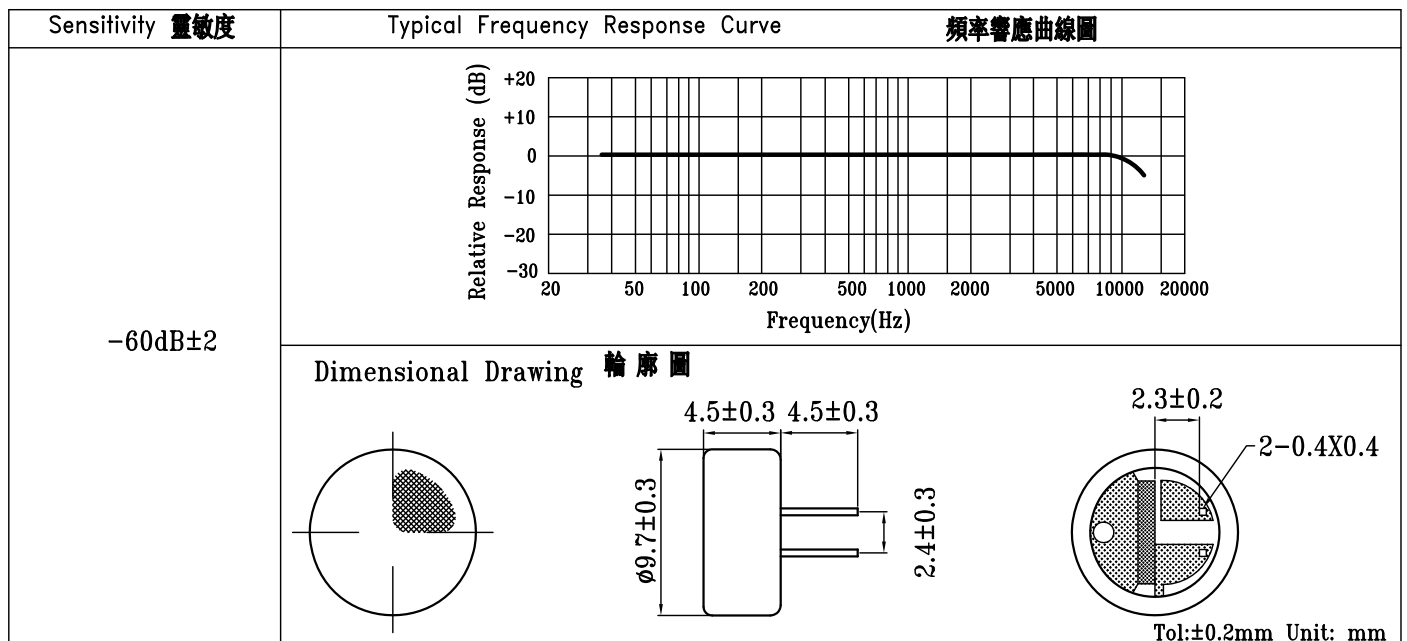

Applications 應用	Specifications 規格
<p>1.Telephone devices 2.Built-in microphones for tape recorders 3.intercoms 4.Completed microphones for recording, testing, and monitoring 5.Sonic controlled toys and sensors 6.Others</p> <p>1. 電話機 2. 磁帶錄音機內裝傳聲器 3. 對講機 4. 錄音, 測試, 監聽用傳聲器 5. 聲頻控制式玩具和傳感器 6. 其他</p>	<p>Sensitivity: See above (0dB=1V/1 μ Bar, 1kHz)</p> <p>Impedance: low impedance</p> <p>Directivity: Omnidirectional</p> <p>Frequency: 20-16,000Hz</p> <p>Max.operation voltage: 10V</p> <p>Standard operation voltage: 1.5V</p> <p>Current consumption: Max.0.3mA</p> <p>Sensitivity reduction: Within-3dB at 1.1V</p> <p>S/N ratio: More than 60dB</p>
<p style="text-align: center;">Schematic Diagram 測定電路圖</p>	<p>靈敏度 參照上述 (0dB=1V/1 μ Bar, 1kHz)</p> <p>阻抗 低阻抗</p> <p>指向性 全向</p> <p>頻率 20-16,000Hz</p> <p>最大工作電壓 10V</p> <p>標準工作電壓 1.5V</p> <p>電流消耗 最大0.3mA</p> <p>靈敏度減低 1.1V時, 在-3dB以內</p> <p>信噪比 大於60dB</p>

保存有效期限:1年

Admitted:

Approved:

Made: