


# 泉州豐群電子有限公司

## C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781  
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579  
FAX:+86-595-22639258

1	MODEL	3645BOX-06(GP)
2	Dimension	36.0X45.0X19.9H Weight 72.0 Gram.
3	Magnet	Materials Rare Earth Size $\varnothing$ 18.4X3.5 mm.
4	Nominal Impedance	4 Ohm $\pm$ 15 %
5	Power Rating	Normal 3.0 W. Maximum 5.0 W.
6	Lowest Resonant Frequency	500 $\pm$ 100 Hz
7	Output Sound Pressure Level	76 $\pm$ 3 dB / 1 Watt 1 Meter.
		Average at 600,800,1000,1200 HZ
8	Frequency Range	400~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 3.46 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 3.46 Volts. (RMS) 48 Hrs.
12	Operation Temperature	-25°C ~ +60°C
13	Storage Temperature	-40°C ~ +70°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

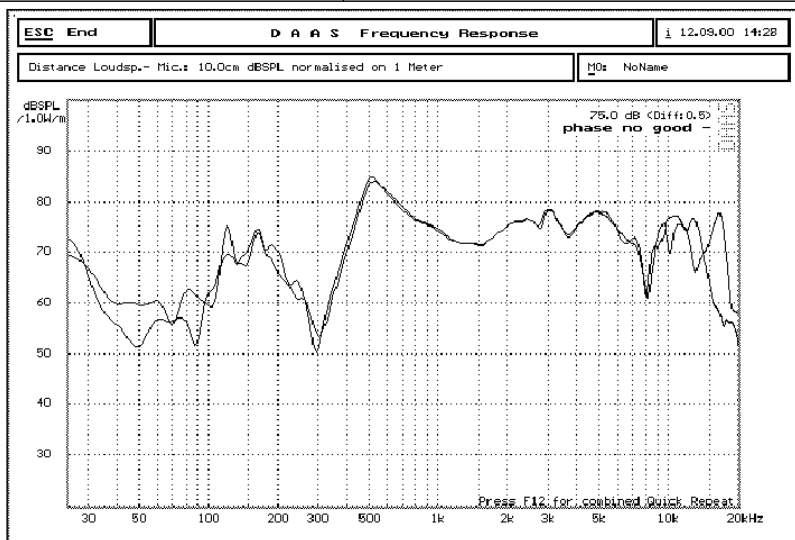

Bill of Material	
ITEM	SPEC.
SURROUND	PU
DIAPHRAGM	/
DUST CAP	MYLAR

Dimension:  
details see drawing name “3645BOX-06 (GP)外观图”。

Unit:mm

Admitted:

Approved:

Made: