


泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

1	MODEL	4040IVBOX-08(GP)
2	Dimension	62.0X51.0X16.0H Weight 60.6 Gram.
3	Magnet	Materials Rare Earth Size ϕ 24.5X3.5 mm.
4	Nominal Impedance	8 Ohm \pm 15 %
5	Power Rating	Normal 4.0 W. Maximum 6.0 W.
6	Lowest Resonant Frequency	460 \pm 92 Hz
7	Output Sound Pressure Level	83 \pm 3 dB / 1 Watt 1 Meter.
		Average at 600,800,1000,1200 Hz
8	Frequency Range	310~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 5.66 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 5.66 Volts. (RMS) 48 Hrs.
12	Operation Temperature	-25°C ~ +60°C
13	Storage Temperature	-40°C ~ +70°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

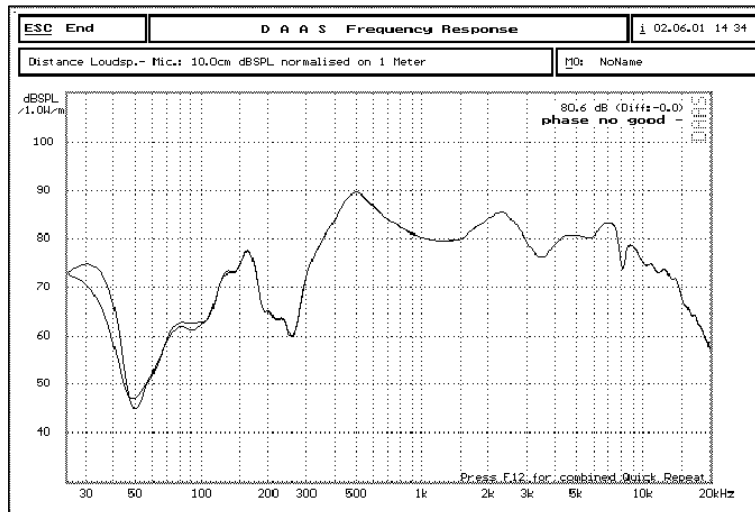

Bill of Material	
ITEM	SPEC.
SURROUND	FOAM
DIAPHRAGM	
DUST CAP	PET

Dimension:
details see drawing name “4040IVBOX-08(GP)外观图”。

Admitted:

Approved:

Made: