


# 泉州豐群電子有限公司

## C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781  
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579  
FAX:+86-595-22639258

1	MODEL	25125BOX-02(GP)			
2	Dimension	25.0X125.0X25.5H	Weight	42.6	Gram.
3	Magnet	Materials	Rare Earth	Size	ø11.0X4.0 mm.
4	Nominal Impedance	8	Ohm	± 15 %	
5	Power Rating	Normal	5.0	W.	Maximum 8.0 W.
6	Lowest Resonant Frequency	850	±	170	Hz
7	Output Sound Pressure Level	84 ± 3 dB / 1 Watt 1 Meter.			
		Average at 1000,1200,1500,2000 Hz			
8	Frequency Range	500~20K	Hz.	Average SPL-10	dB.
9	Distortion	5 %	Maximum At	1000	Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 6.32 Volts Sine Wave.			
11	Load Test	White Noise with Weighted Filter 6.32 Volts. (RMS) 96 Hrs.			
12	Operation Temperature	-25°C ~ +60°C			
13	Storage Temperature	-40°C ~ +70°C			
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC			
		Current to the "+" or "Marked" Terminal.			
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.			

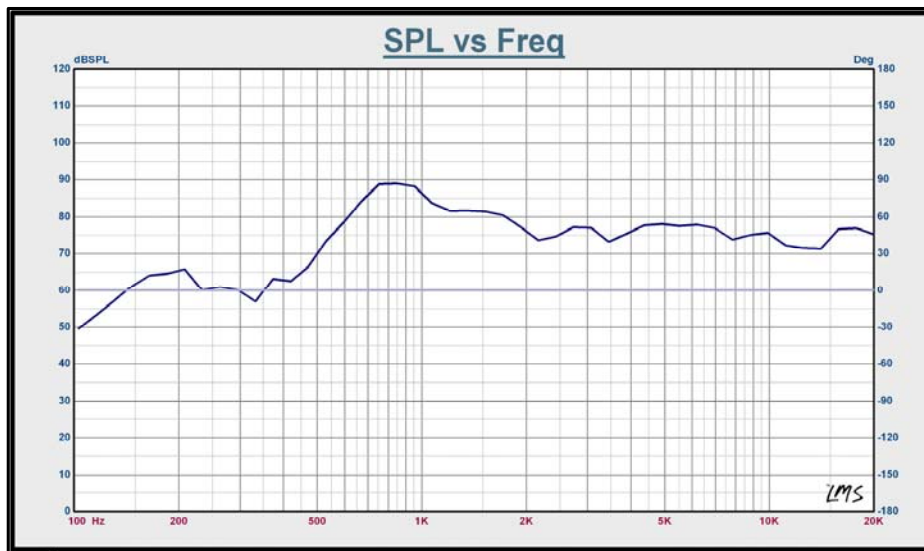

Bill of Material	
ITEM	SPEC.
SURROUND	CLOTH
CONE	PAPER
DUST CAP	PAPER

Dimension:  
details see drawing name "25125BOX-02(GP)外觀圖".

Unit:mm

Admitted:

Approved:

Made: