


泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

1	MODEL	36IBOX-07(GP)
2	Dimension	150.0X40.0X24.5H Weight 69.0*2 Gram.
3	Magnet	Materials Rare Earth Size $\phi 12.5 \times 1.5$ mm. $\phi 12.5 \times 3.5$
4	Nominal Impedance	8 Ohm $\pm 15\%$
5	Power Rating	Normal 7.0 W. Maximum 10.0 W.
6	Lowest Resonant Frequency	500 \pm 100 Hz
7	Output Sound Pressure Level	84 \pm 3 dB / 1 Watt 1 Meter.
		Average at 600,800,1000,1200 Hz
8	Frequency Range	300~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 7.5 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 7.5 Volts. (RMS) 96 Hrs.
12	Operation Temperature	-25°C ~ +70°C
13	Storage Temperature	-40°C ~ +85°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

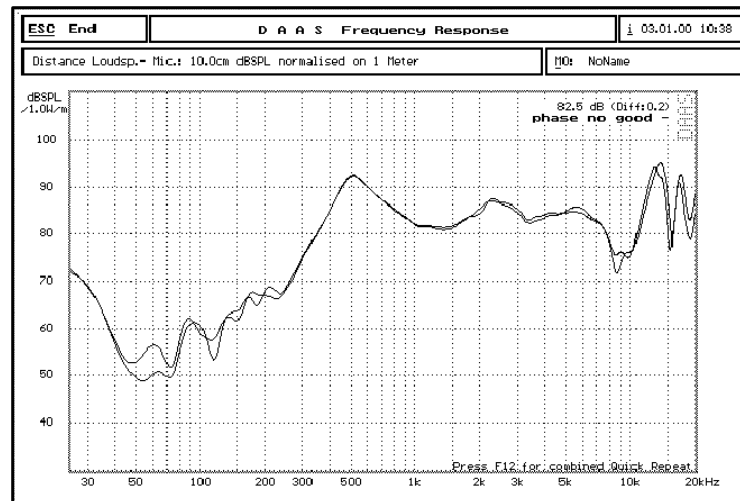

Dimension:

details see drawing name “36IBOX-07(GP)左外观图” AND “36IBOX-07(GP)右外观图”。

Admitted:

Approved:

Made: