


# 泉州豐群電子有限公司

## C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781  
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579  
FAX:+86-595-22639258

1	MODEL	4040CP08P1GP)
2	Dimension	40.1X40.1X14.5H Weight 43.0 Gram.
3	Magnet	Materials Rare Earth Size $\phi 24.5 \times 3.5$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$
5	Power Rating	Normal 5.0 W. Maximum 8.0 W.
6	Lowest Resonant Frequency	440 $\pm$ 88 Hz
7	Output Sound Pressure Level	81 $\pm$ 3 dB / 1 Watt 1 Meter.
		Average at 600,800,1000,1200 Hz
8	Frequency Range	280~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 5.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 6.32 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 6.32 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +60°C
13	Storage Temperature	-40°C ~ +70°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

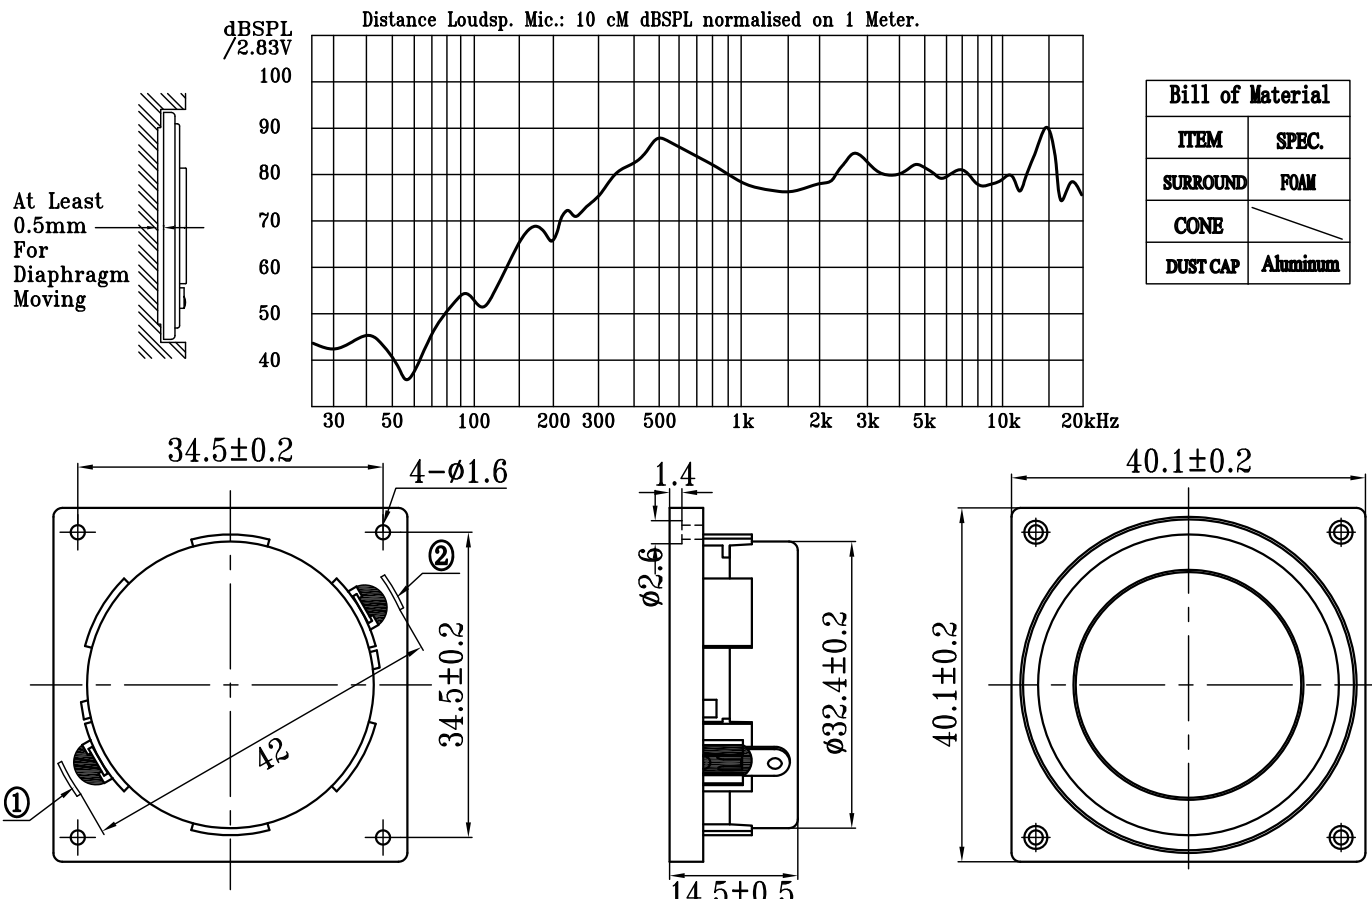

Unit:mm 注：焊锡和黑胶厚度不可超过图中“①”、“②”处标记

Admitted:

Approved:

Made: