


泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.


OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

| | | |
|----|-----------------------------|--|
| 1 | MODEL | F36M372F(GP)(36CS24M11-75BT1) |
| 2 | Dimension | Outer Diameter 36 mm Baffle Opening 32.3 mm. |
| | | Height Refer to drawing Weight 9.6 Gram. |
| 3 | Magnet | Materials Rare Earth Size $\phi 12.5 \times 2.0$ mm. |
| 4 | Nominal Impedance | 24 Ohm $\pm 15\%$ |
| 5 | Power Rating | Normal 1.0 W. Maximum 2.0 W. |
| 6 | Lowest Resonant Frequency | 550 \pm 110 Hz |
| 7 | Output Sound Pressure Level | 82 \pm 3 dB / 1 Watt 1 Meter. |
| | | Average at 600,800,1000,1200 Hz |
| 8 | Frequency Range | 320~7300 Hz. Average SPL-10 dB. |
| 9 | Distortion | 5 % Maximum At 1000 Hz 1.0 W. |
| 10 | Abnormal Sound Test | Must be Normally Tested By 4.9 Volts Sine Wave. |
| 11 | Load Test | White Noise with Weighted Filter 4.9 Volts. (RMS) 24 Hrs. |
| 12 | Operation Temperature | -25°C ~ +60°C |
| 13 | Storage Temperature | -40°C ~ +70°C |
| 14 | Polarity | Diaphragm shall move Forward when Apply a Positive DC |
| | | Current to the "+" or "Marked" Terminal. |
| 15 | Remarks | Above specifications on the strength of CNS4784 and CNS4785. |

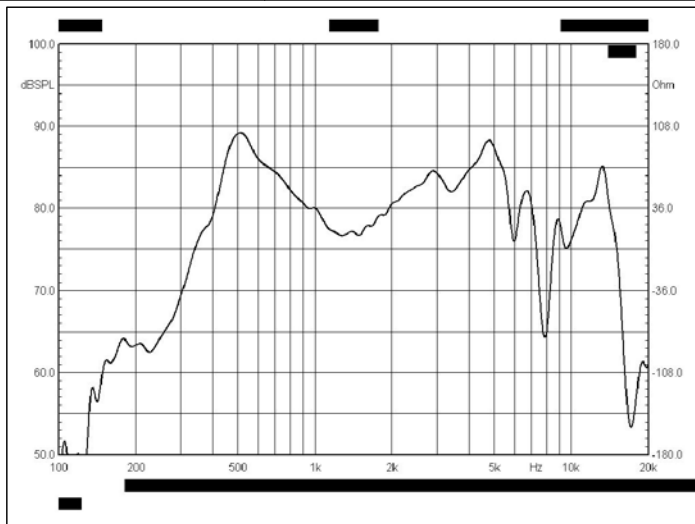

| Bill of Material | |
|------------------|-----|
| DIAPHRAGM | PET |

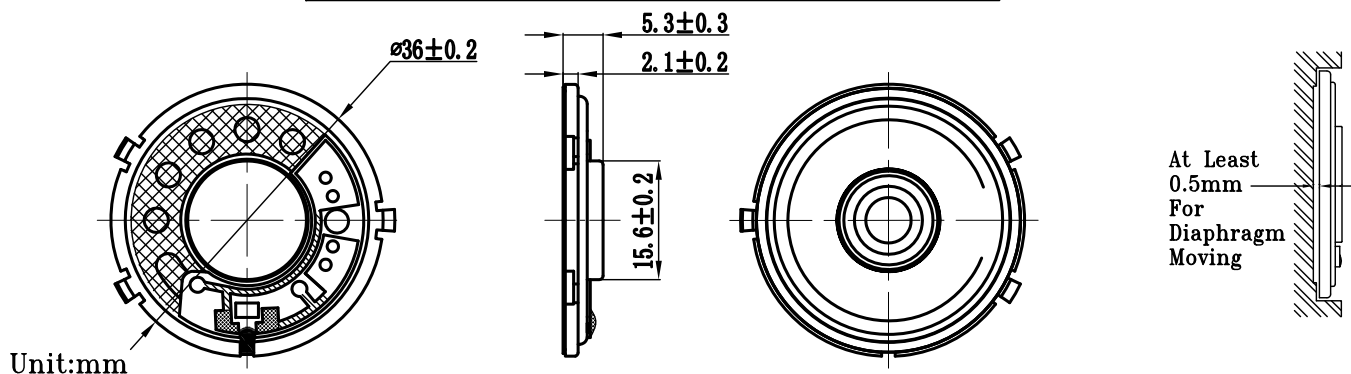

Admitted:

Approved:

Made: