



泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22639258

1	MODEL	F30P52B(GP)(30FL08P-75NT1-F)
2	Dimension	Outer Diameter 30 mm Baffle Opening 27.6 mm.
		Height Refer to drawing Weight 8.0 Gram.
3	Magnet	Materials Ferrite Size $\phi 20.6 \times \phi 7.2 \times 3$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$
5	Power Rating	Normal 1.0 W. Maximum 2.0 W.
6	Lowest Resonant Frequency	830 \pm 166 Hz
7	Output Sound Pressure Level	80 \pm 3 dB / 1 Watt 1 Meter.
		Average at 1000,1200,1500,2000 Hz
8	Frequency Range	470~5000 Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 2.83 Volts Sine Wave.
11	Load Test	Pink Noise with Weighted Filter 2.83 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +60°C
13	Storage Temperature	-40°C ~ +70°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

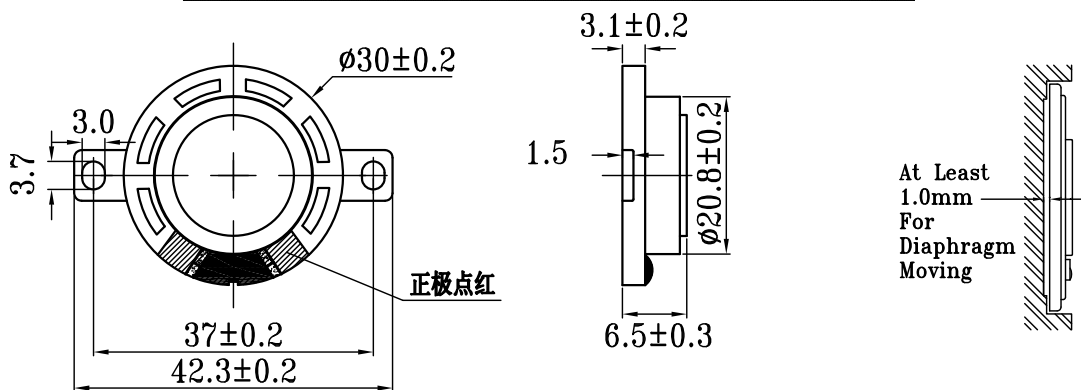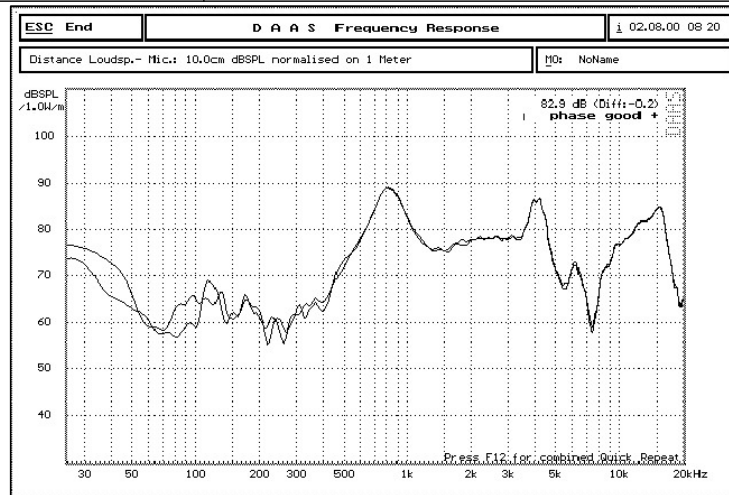

Unit:mm

Admitted:

Approved:

Made: