



泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82522781
FAX:+886-2-82522782

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22632580

1	MODEL	F40P89H(GP)40CS32P1X-19NT2)
2	Dimension	Outer Diameter 40 mm Baffle Opening 38.0 mm.
		Height Refer to drawing Weight 7.0 Gram.
3	Magnet	Materials Rare Earth Size $\phi 12.5 \times 2.0$ mm.
4	Nominal Impedance	32 Ohm $\pm 15\%$
5	Power Rating	Normal 60 mW. Maximum 100 mW.
6	Lowest Resonant Frequency	110 \pm 22 Hz
7	Output Sound Pressure Level	98 \pm 3 db / 1mW 1cM.
		Average at 150,200,250,300 HZ
8	Frequency Range	68~20K Hz. Average SPL-10 db.
9	Distortion	5 % Maximum At 1000 Hz 60 mW.
10	Abnormal Sound Test	Must be Normally Tested By 1.39 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 1.39 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +50°C
13	Storage Temperature	-40°C ~ +60°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

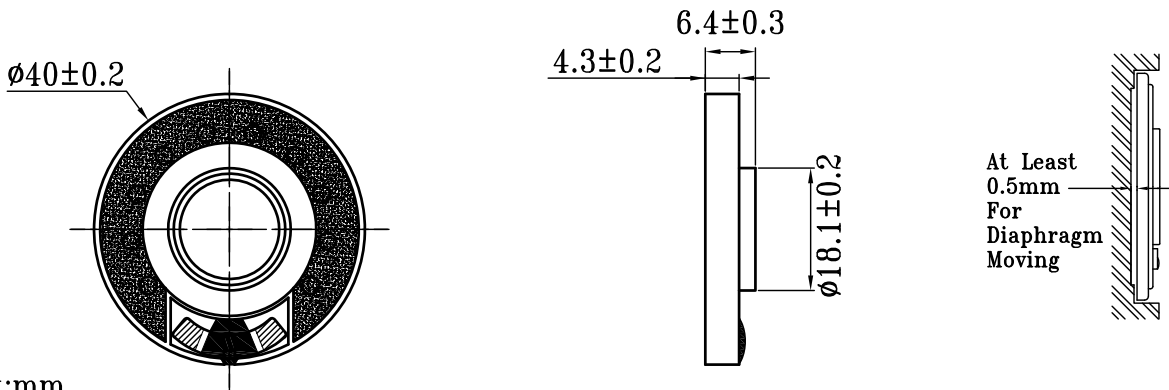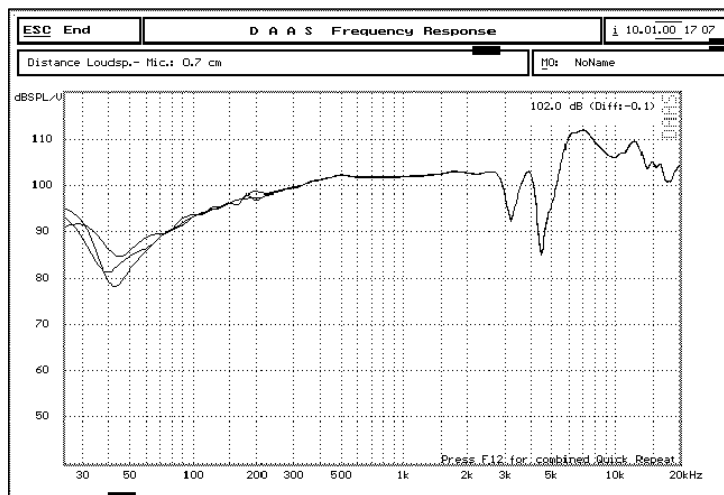

Unit:mm

Admitted:

Approved:

Made: