


泉州豐群電子有限公司

C.C. FENG CHIUN ELECTRONIC CO., LTD.

OFFICE: TEL:+886-2-82271560
FAX:+886-2-82271561

FACTORY: TEL:+86-595-22632579
FAX:+86-595-22632580

1	MODEL	ZY-LTS-74(GP)
2	Dimension	300.0X56.0X50.0H Weight 599.5 Gram.
3	Magnet	Materials Rare Earth Size $\phi 12.5 \times 3.0$ $\phi 19.0 \times 4.0$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$
5	Power Rating	Normal 10.0 W. Maximum 15.0 W.
6	Lowest Resonant Frequency	260 \pm 52 Hz
7	Output Sound Pressure Level	77 \pm 3 dB / 1 Watt 1 Meter.
		Average at 400,500,600,800 Hz
8	Frequency Range	120~20K Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 8.94 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 8.94 Volts. (RMS) 96 Hrs.
12	Operation Temperature	-25°C ~ +70°C
13	Storage Temperature	-40°C ~ +85°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.



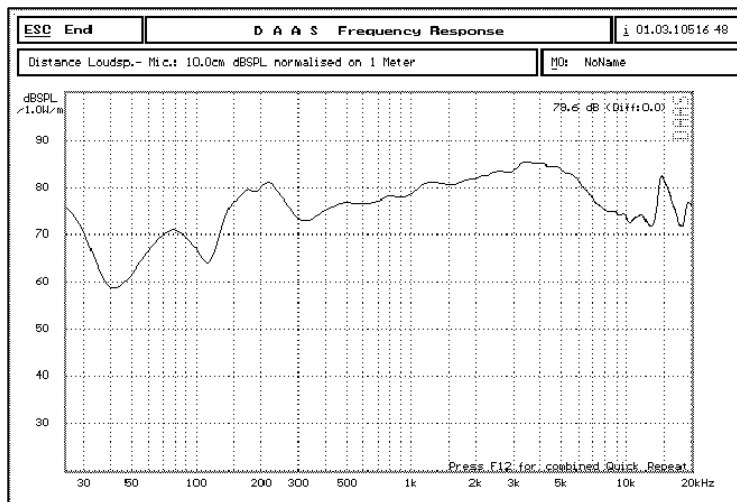


Dimension:
details see drawing name “ZY-LTS-74外观图”。

Admitted:

Approved:

Made:

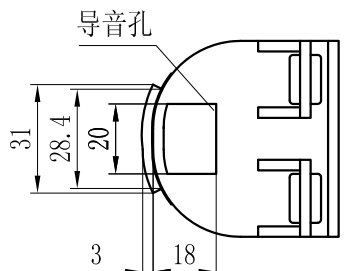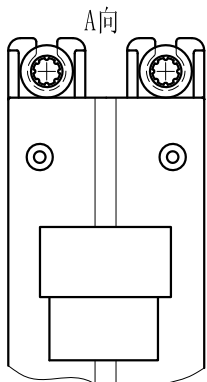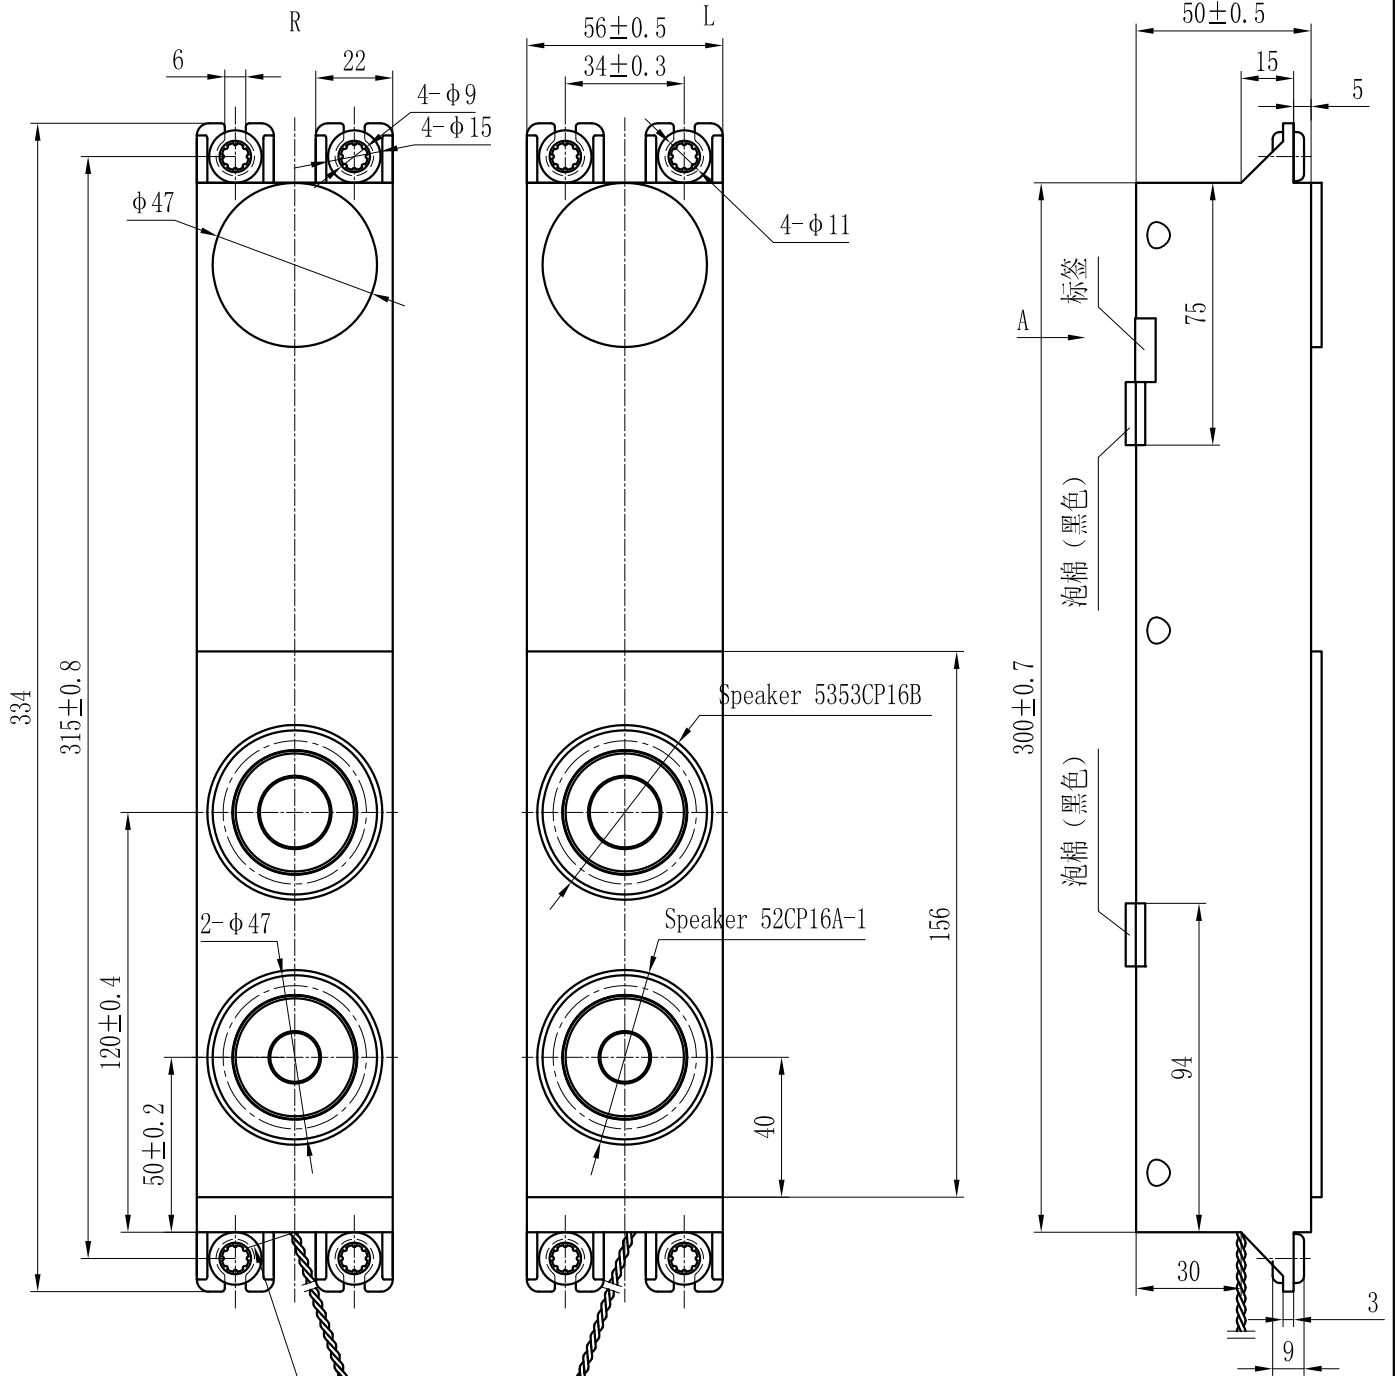

注：标签内容、规格依构成表

ZY-LTS-74 (GP) 外观图		产品名称	ZY-LTS-74 (GP) 型音箱		
		图号	FC-ZY-LTS-74-12		
设计		比例	1:5	数量	
制图		材料		重重	
审核		 泉州豐勤電子有限公司 QUANZHOU FENGQIN ELECTRONIC CO.,LTD.			
批准					